
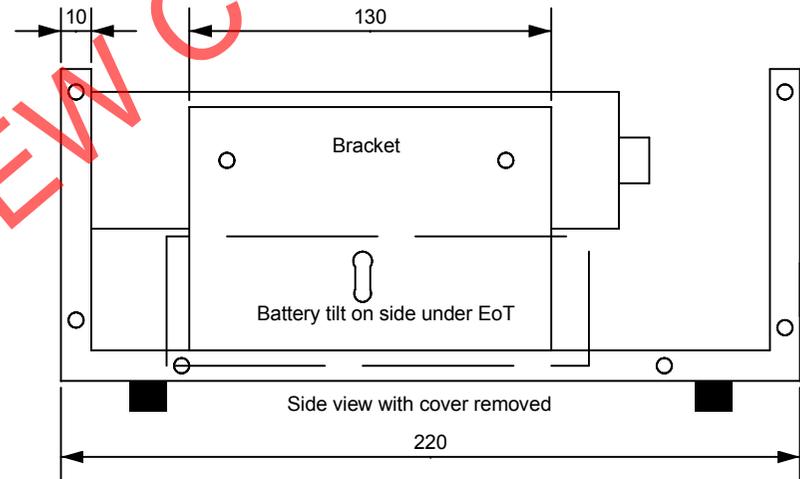
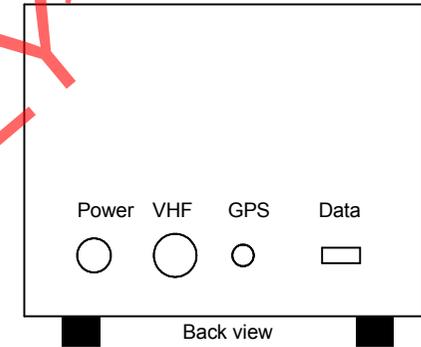
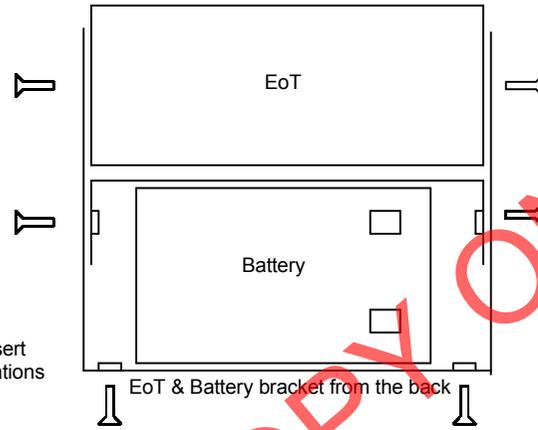
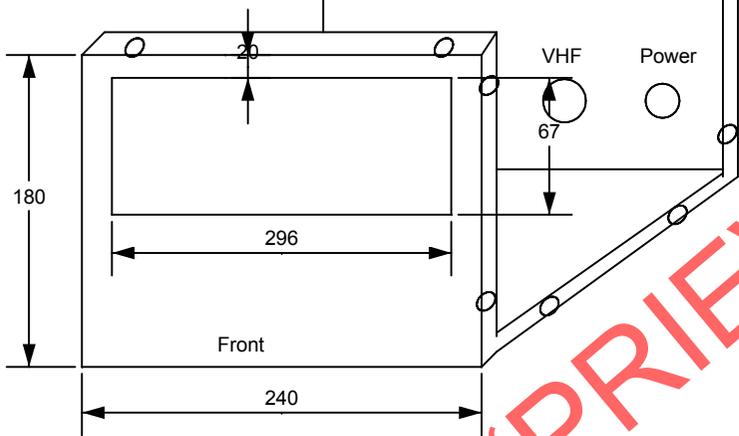


- Notes: 1. All metal 1.6mm
 2. inside bracket iondised. Outside powder coated in hammer tone black
 3.. Four rubber feeds must be mounted by screws.
 4. All antenna & Data fly leads must be installed
 5. A standard Telemeter battery must be fitted and wired to the power plug.
 6. Handle made from 10mm solid material and chrome or stainless steel.
 7. All screws 3mm stainless steel with hex or torx heads.
 8. Dimentions in mm

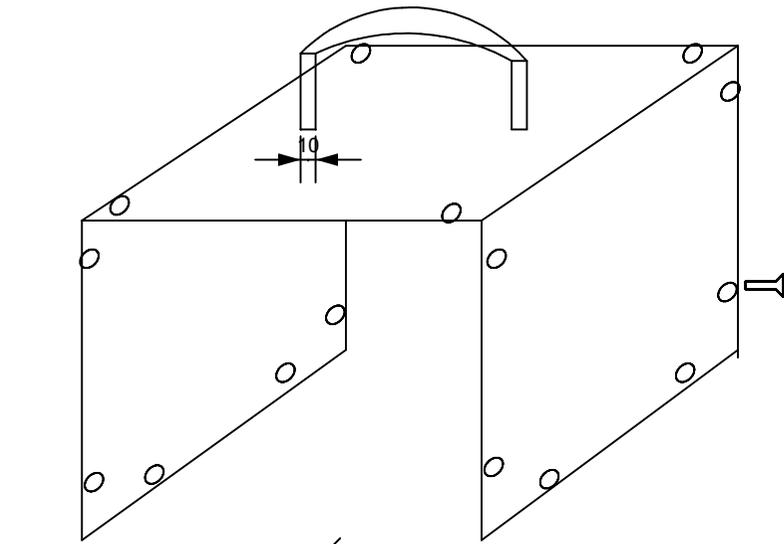

© This document as a whole is protected by copyright. The information herein is the sole property of Transnet Ltd. It may not be used, disclosed or reproduced in part or in whole in any manner whatsoever, except with the written permission of and in a manner permitted by the proprietors.

Drawing: Portable EoT unit
 Drawn by: Nick
 Date: 28 June 2010